




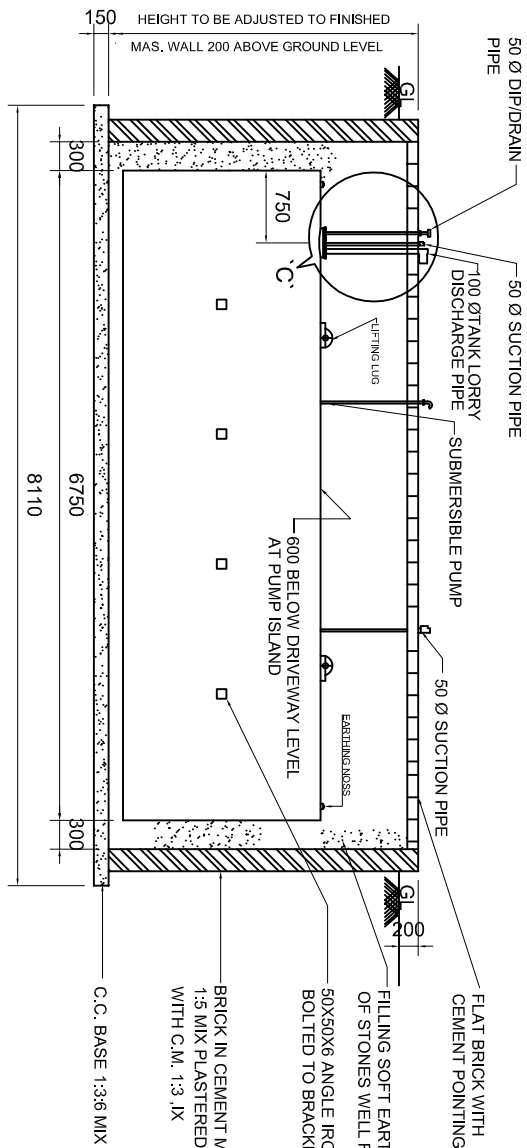


SECTION A-A

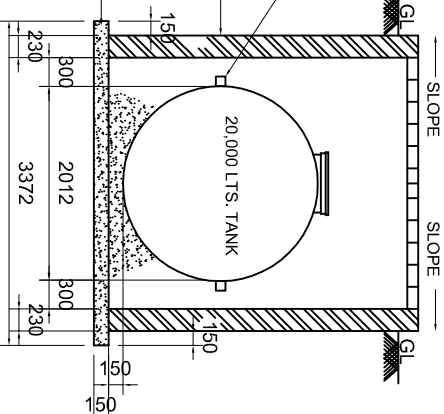

SECTION B-B

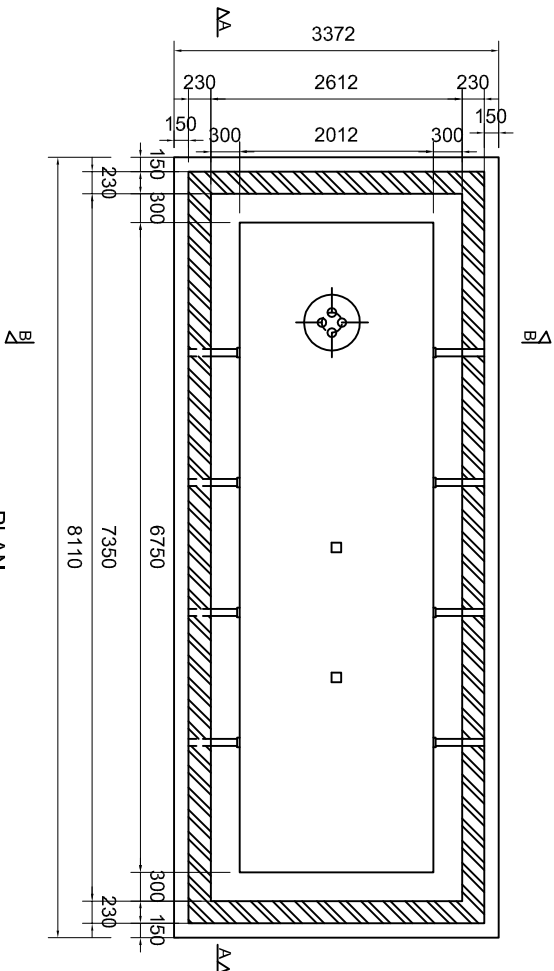

PLAN

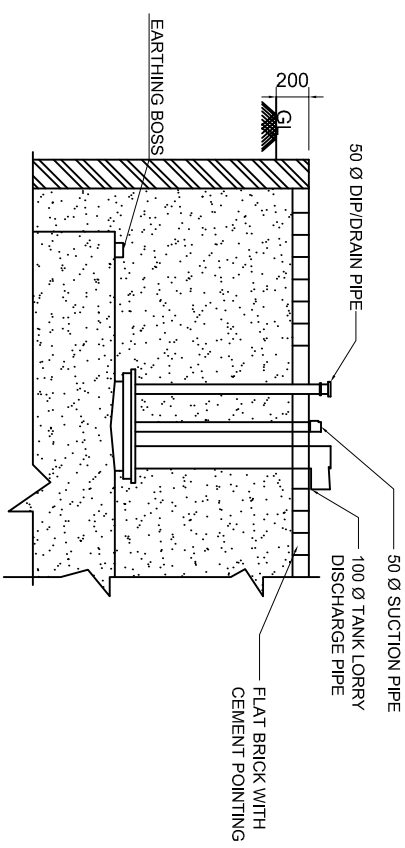

DETAILS AT 'C'

(REFER DETAIL DRG. NO. RE 382)

NOTES:-

- 1) TANKS SHOULD BE GIVEN HYDRAULIC PRESSURE TEST PRIOR TO INSTALLATION AND BEFORE ANY PROTECTIVE COATING IS APPLIED THE TEST SHOULD BE MAINTAINED AT A CONTROLLED PRESSURE OF 0.36 KG/SQ. C.M. FOR 2 HOURS.
- 2) DIP ROD SUPPLIED WITH TANK FOR THIS TYPE OF INSTALLATION SHOULD BE
- 3) BACK FILLING OF EARTH SHOULD BE CARRIED OUT SIMALTANEOUSLY OUTSIDE AND INSIDE MASONRY WALL

TANK IN MASONRY PIT

BHARAT PETROLEUM CORPORATION LTD.

TITLE: INSTALLATION DETAILS OF 20,000 LITRES
CYLINDRICAL UNDERGROUND TANK

SCALE :-

DRAWN:

CHECKED

SHEET NO.

DATE : 20/12/1999

Sr. Mgr. (DESIGN & DEVP.)

DATE DRAWING NO.

NUMBERS CROSSED OUT ARE
SUPERSEDED DRAWINGS

DRAWING NO.

RE.DRG. 402