




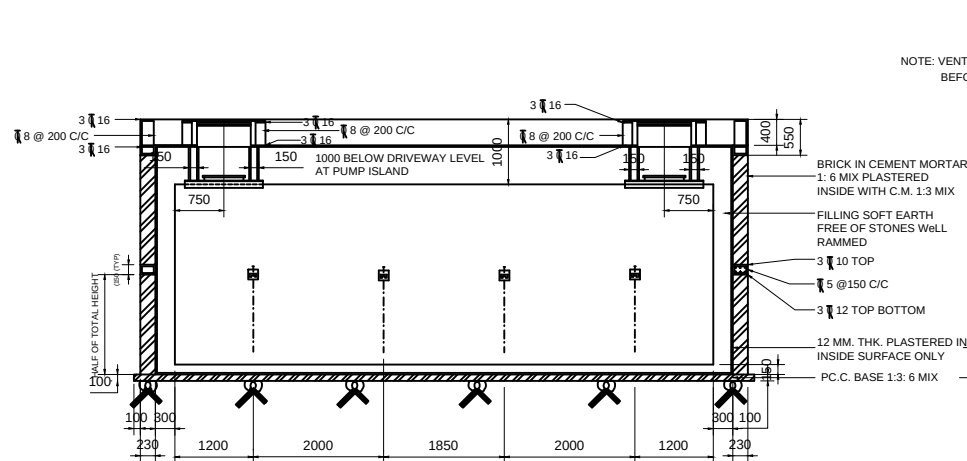


SECTION A-A

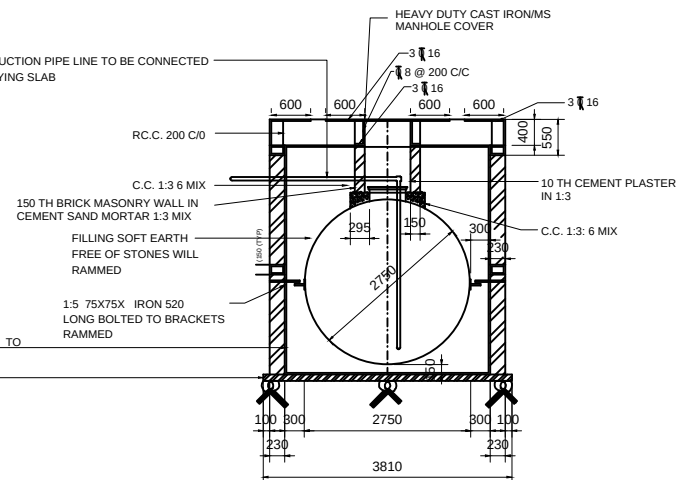

SECTION B-B

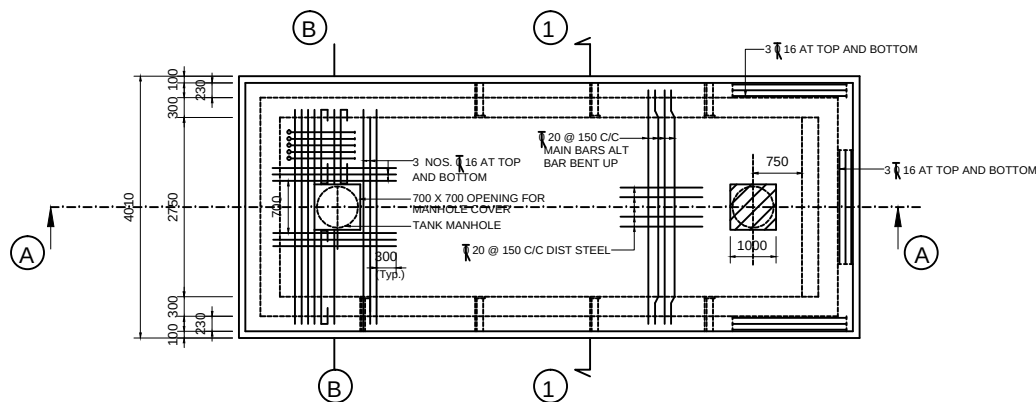

PLAN

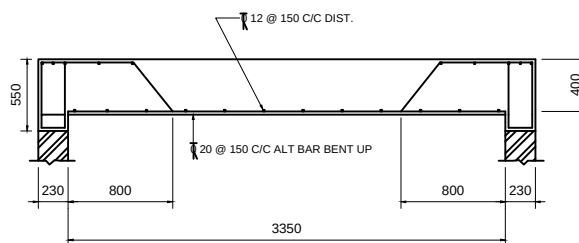

SECTION 1-1

BOTTOM (STEEL)

- (1) 20 MM Φ - 79 X 3350 (-----)
(2) 12 MM. Φ - 23 X 9850

MANHOLE BEAM (1) (Each Beam)

- (1) 16 Φ - 6 X 2 X 3350 (Top & Bottom)
6 X 2 X 2200
5550
(2) 8MM. - 28 X 1400 -do-
MANHOLE

TOP BEAM

- (1) - 16 Φ - 6 X 12310) X 2
6 X 3810
(2) - 18 MM. - 215 X 1560

CENTER BEAM

- (1) 10 Φ - 6 X 12310
6 X 3810
12 Φ 6 X 12310
6 X 3810
(2) 8 MM Φ - 215 X 760

NOTE:

- Tanks should be given hydraulic pressure test prior to installation & before protective coat is applied. The test should be maintained at a controlled pressure of 0.5 kg/Sq.cm. for 1 Hr.
- Back filling of the earth should be carried out simultaneously outside & inside the Masonry wall.
- C.C base may be eliminated where the soil met with is hard non yielding layer in such cases only 53 mm x 150 mm thick footing under masonry walls should be provided.

BHARAT PETROLEUM CORPORATION LTD.					
SUBJECT: MASONARY PIT WITH R.C.C. SLAB ON TOP					
INSTALLATION DRAWING FOR 45 KL U/G TANK				DATE	DRAWING NO.
SCALE :NTS	DRAWN:	TRACED	CHECKED	DRAWING NO.	
DATE :02/03/98	G.M. (E&P) / A.E. TTRACED			E&P/RET/TI04	