

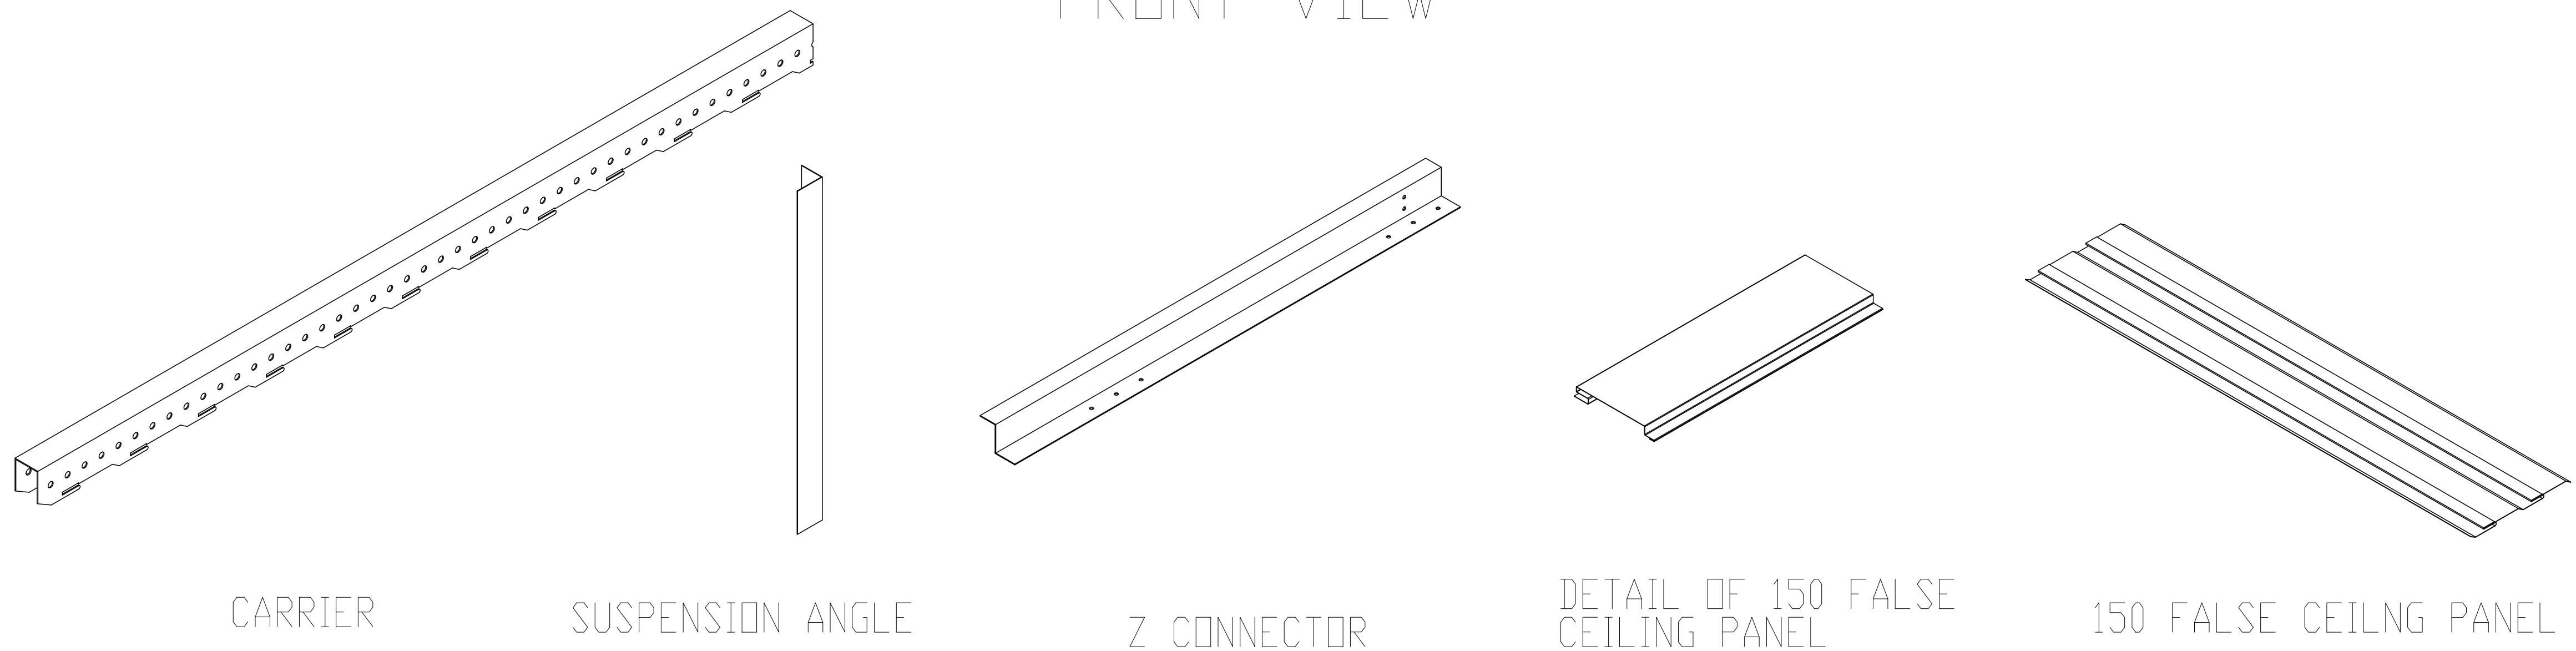
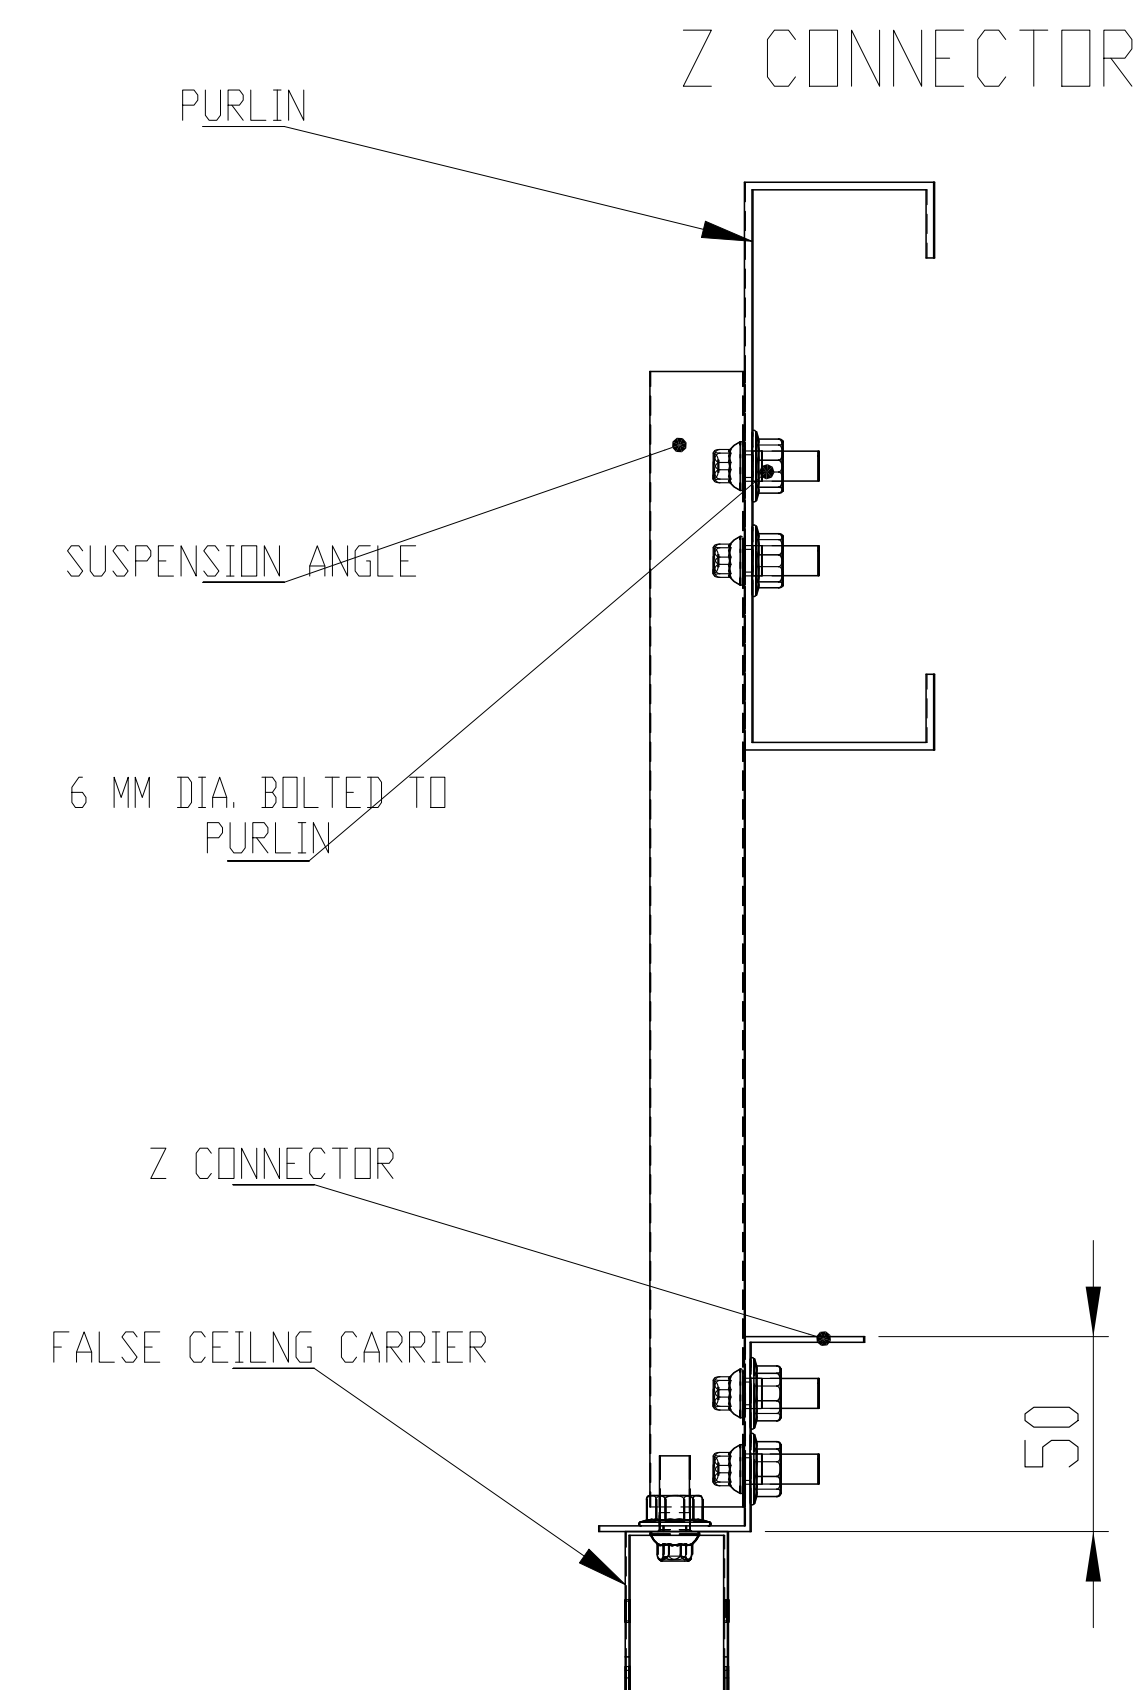


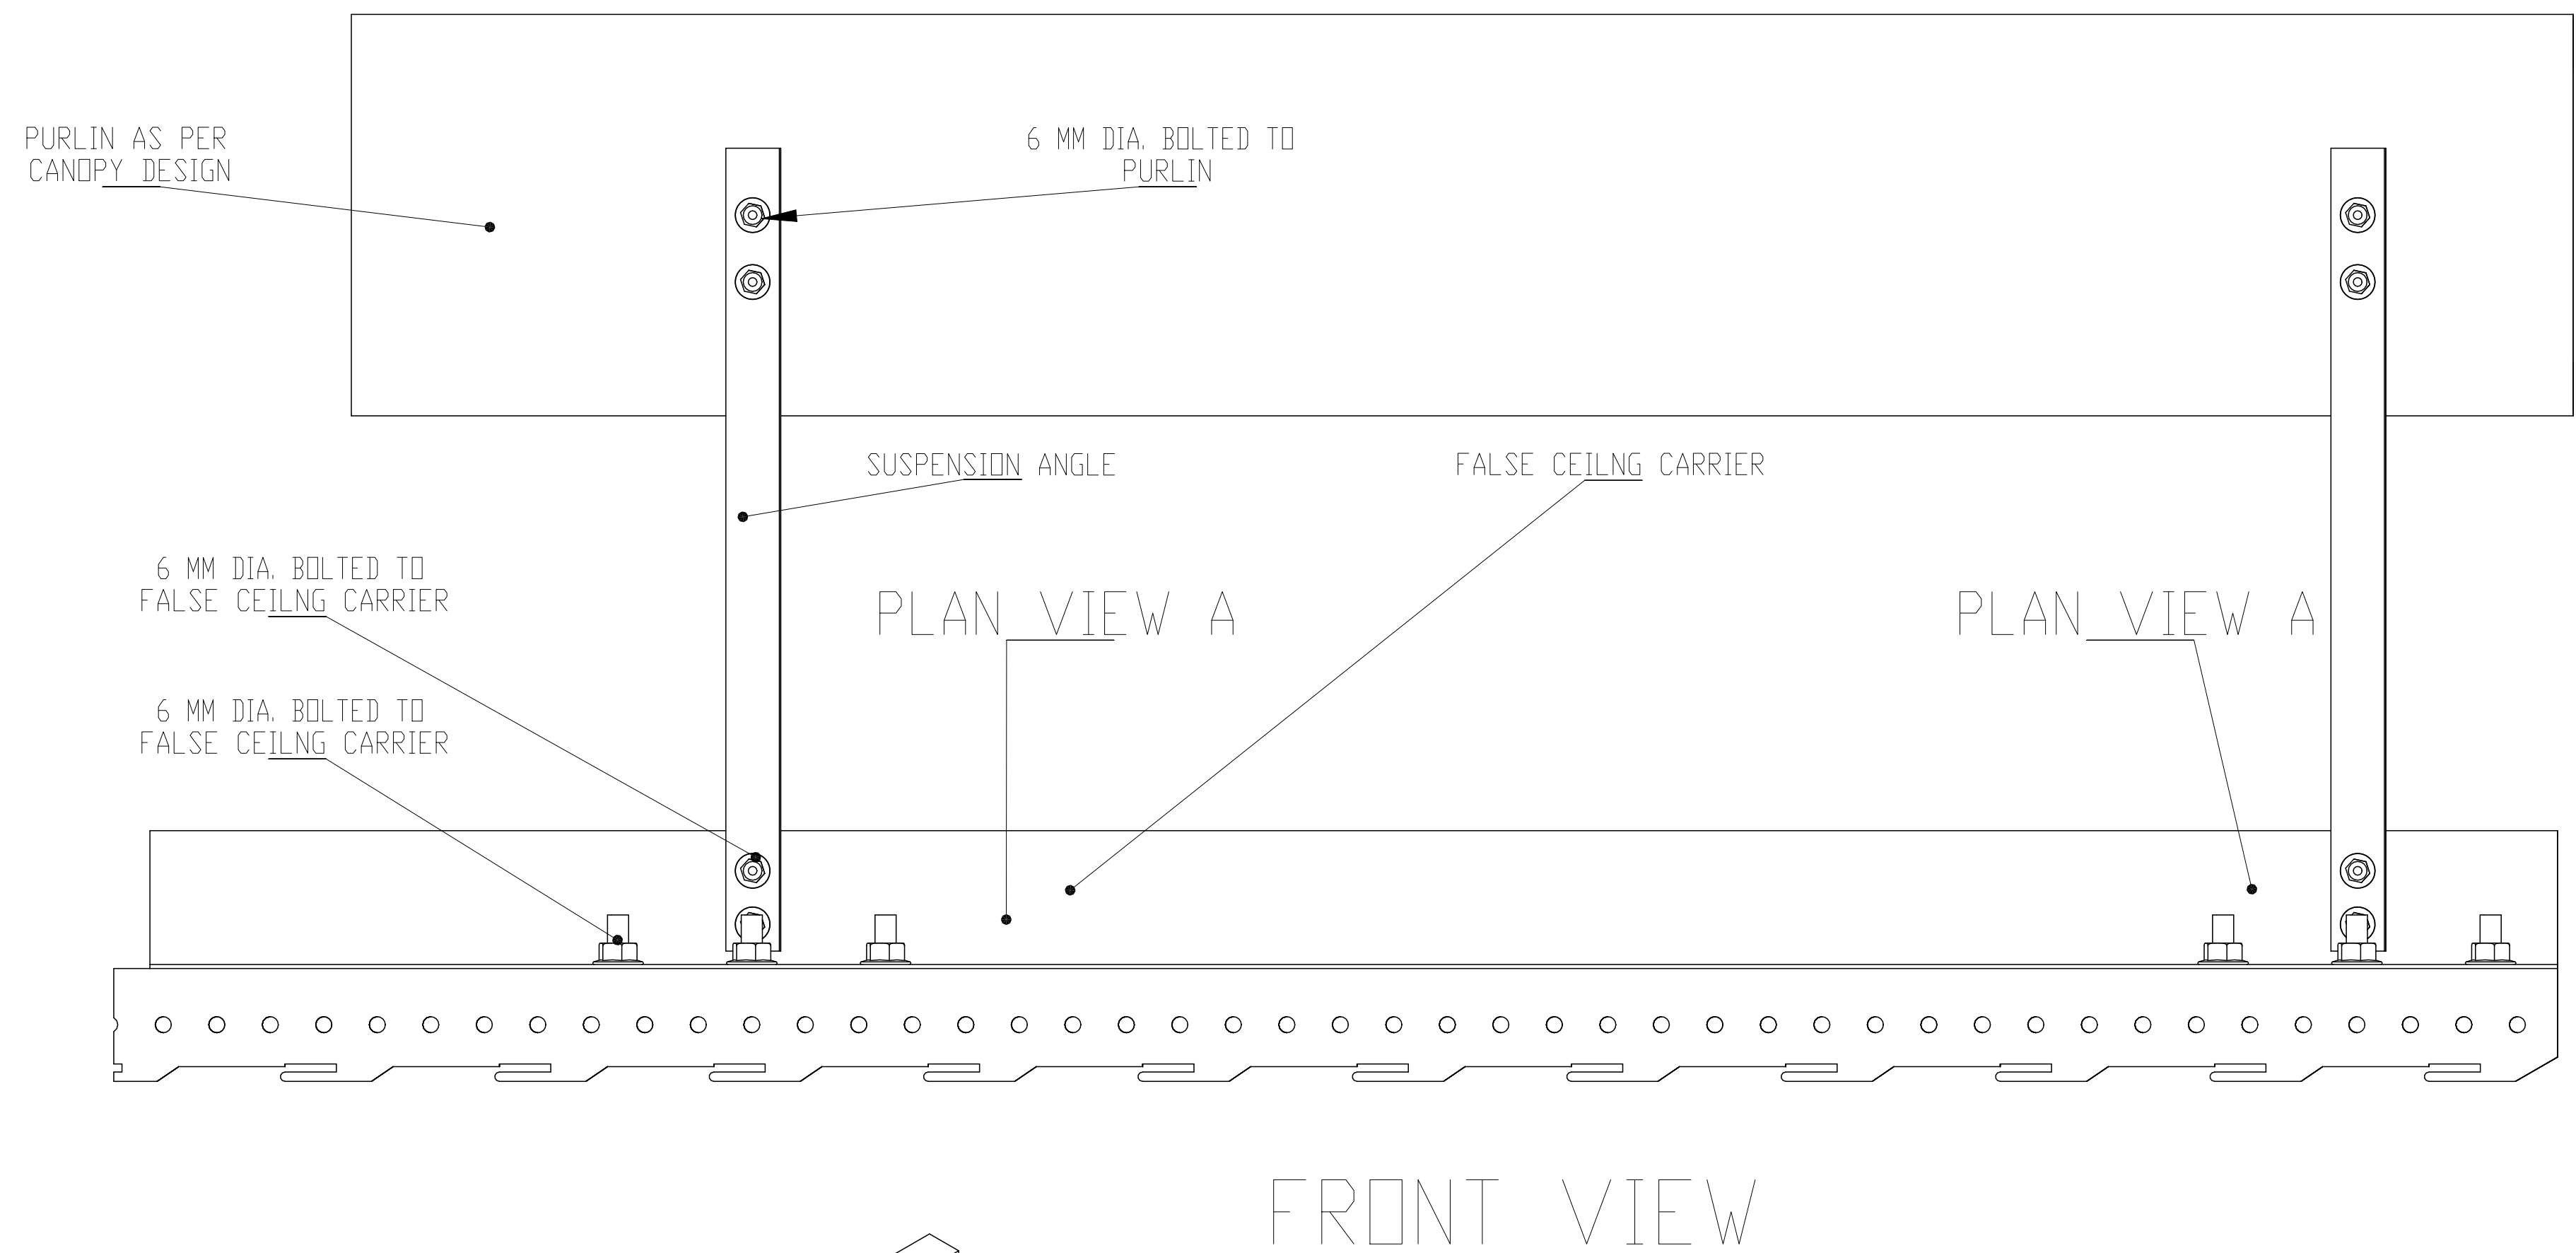

- ### NOTES FOR STRUCTURAL STEEL:-
- 1) Buttwelds Shall Be Complete Penetration Butt Welds Developing Full Strength Of Members (Unless Noted Otherwise)
 - 2) All Bolts Shall Be HT Grade 8.8 UNO. All Holes Are 18 ϕ 16 ϕ HT Bolt Typ (UNO).
 - 3) All Shop Welds Are 6mm Continuous Fillet Weld (UNO).
 - 4) All Fabrication Shall Be Done By Full Scale Setout. The Erection And Assembly Clearances/Tolerances To Be Checked And Provided By The Fabricator.
 - 5) Steel Surfaces In Contact With Concrete/Grout/Mortar Shall Be Left Unpainted & Cleaned Thoroughly.
 - 6) Gusset/Pack Plates Shall Be 6mm Thk. (UNO).
 - 7) No Splices Shall Be Provided Without Prior Approved Detail.
 - 8) Splices Shall Develop Full Strength Of The Smaller Section And Shall Fully Welded After Erection(UNO).
 - 9) All Structural Steel Work Shall Be Painted With Two Coats Of Zinc Rich Primer And Two Coats Of Enamel Paint Of Approved Shade.
 - 10) The Column Shall Be Oriented In Such Way That Longer Side Remains Parallel To The Shorter Side Of Canopy
 - 1) Along Longer Side (400) Of Column The Spacing Between Anchor Bolt Will Be 250MM

PROJECT CONTRACTOR :	
PROJECT 2 ISLAND 14X18 STRUCTURAL CANOPY	
M/s STANDARD CANOPY	
AT:-----	
CLIENT BHARAT PETROLEUM CORP. LTD	
TITLE LAYOUT AND STRUCTURAL STEEL DETAILS OF CANOPY COLUMNS, MAIN BEAMS, PURLIN & TIE RODS	
CONFIG STRUCTURES D-402 D K TOWER SECTOR - 20 , AIROLI NAVI - MUMBAI 400 708 CONTACT NO : 7777091413	DRG NO :DT/24-25/-- DATE : 25/04/2024 CKD BY. : GSK DESIGN BY : GSK DRN BY : KIRAN

Signature
For M/s Config Structure
Dr. G. S. Kame

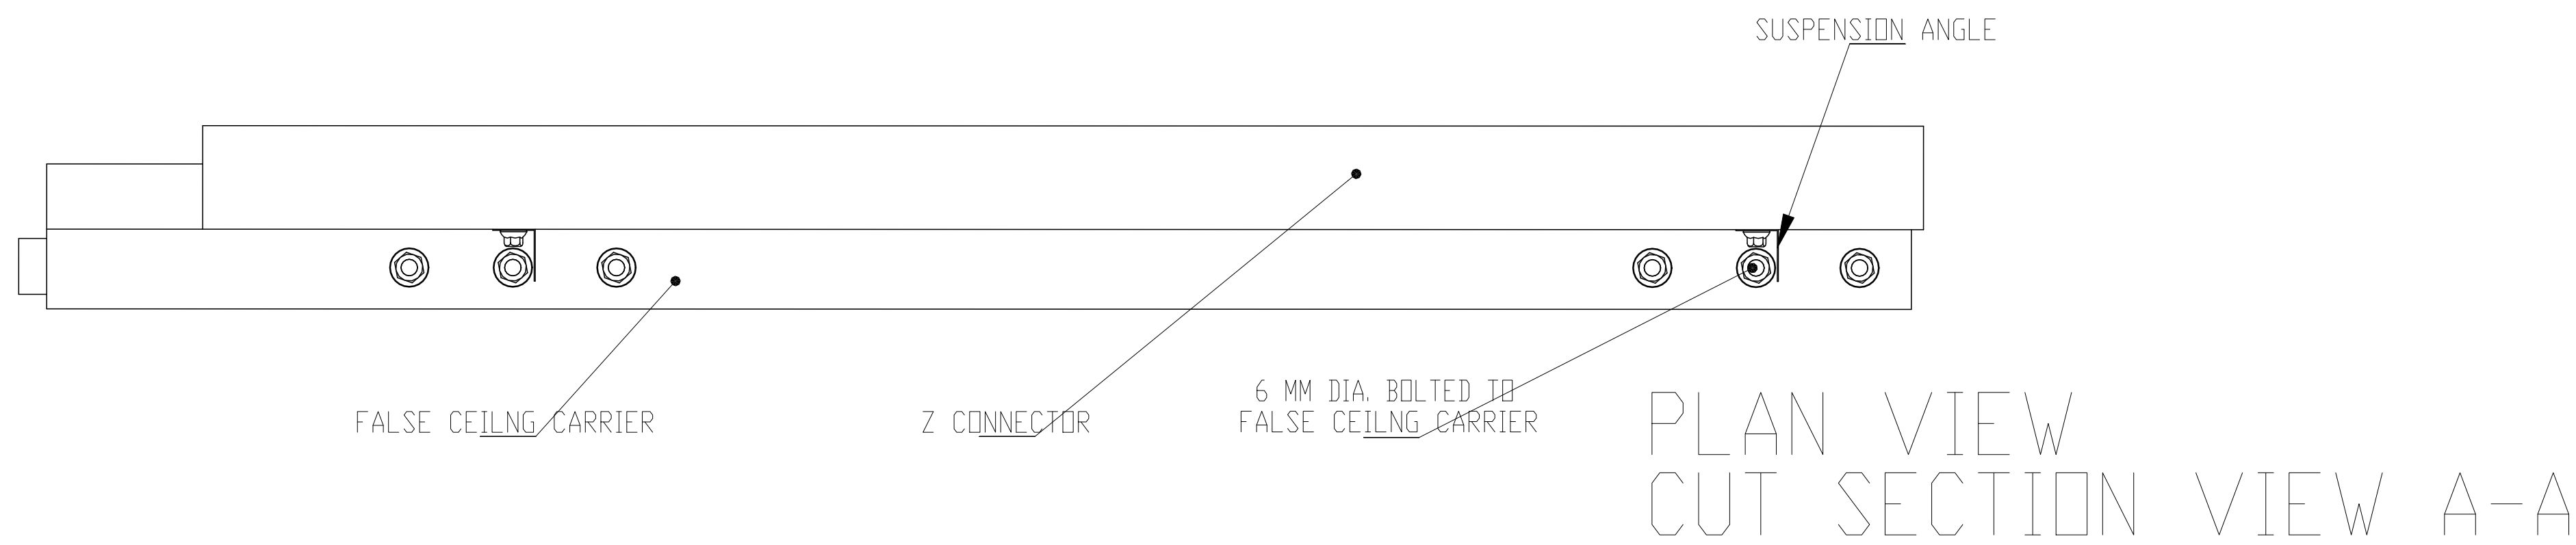

For M/s Config Structure
Dr. G. S. Kame


DO NOT SCALE DRAWING		Units:
TITLE: FALSE CEILING AND JOINT DETAILS		
DWG NO. DT/24-25/NPD/009		A3
SCALE: NOT AS PER SCALE		SHEET 1 OF 1

**WEIGHT CALCULATION SHEET
STANDARD CANOPY**

CANOPY STEEL COSTING 14X18 Mtr = 252 Sq.Mtr.

Sr.	Details	Item	Thk.	Length	Width	Weight	Weight	Qty.	Weight
			mm.	Mtr.	Mtr.	per Mtr.	per UOM.	Nos.	Total Kgs.
1	Column	400X200X6	6	6.50	1.20	56.52	367.38	4	1469.52
		Base Plate	20	0.65	0.55	86.35	56.13	4	224.51
		B.PLT Stiffner	10	0.15	0.12	9.42	1.41	16	22.61
		B.PLT Stiffner	10	0.15	0.63	49.46	7.42	8	59.35
		Conn. PLT	10	0.24	0.30	23.55	5.65	16	90.43
		Plt	10	0.40	0.20	15.70	6.28	8	50.24
		Cap Down TakePlate	10	0.35	0.20	15.70	5.50	8	43.96
	50X50X5	Support Angle	5	0.20		3.80	0.76	8	6.08
2	Raker	Channel 300X100X4	4	14.00	0.50	15.70	219.80	4	879.20
		Side _ Joint Plate	12	0.60	0.20	18.84	11.30	8	90.43
		TOP & Bott _ Joint Plate	16	0.60	0.08	10.05	6.03	16	96.46
		Batten PLT	12	0.38	0.20	18.84	7.16	60	429.55
		FLT	12	4.00	0.10	9.42	37.68	16	602.88
		FLT	6	0.50	0.20	9.42	4.71	8	37.68
		Purlin Cleat1	6	0.32	0.16	7.54	2.37	8	18.99
		CLT 2	6	0.34	0.16	7.54	2.56	4	10.25
		CLT 3	6	0.37	0.16	7.54	2.75	8	22.01
		CLT 4	6	0.39	0.16	7.54	2.94	8	23.51
		CLT 5	6	0.42	0.16	7.54	3.13	4	12.51
		CLT Stiffner1	6	0.31	0.08	3.53	1.08	8	8.62
		CLT 2	6	0.33	0.08	3.53	1.17	4	4.66
		CLT 3	6	0.36	0.08	3.53	1.25	8	10.03
		CLT 4	6	0.38	0.08	3.53	1.34	8	10.74
		CLT 5	6	0.41	0.08	3.53	1.43	4	5.72
3	Banding Frame	ISA 50 x 50 x 5	5	4.67		3.80	17.75	12	212.95
		ISA 50 x 50 x 5	5	6.00		3.80	22.80	12	273.60
		ISA 50 x 50 x 5	5	0.65		3.80	2.47	24	59.28
		ISA 40 X 40 X 5	5	0.65		3.00	1.95	68	132.60
		ISA 40 X 40 X 5	5	1.40		3.00	4.20	36	151.20
		ISA 40 X 40 X 5	5	1.28		3.00	3.84	28	107.52
		ISA 40 X 40 X 5	5	1.35		3.00	4.05	38	153.90
4	Purlin	250 x 75 x 20 x 2.0	2	18.00		6.90	124.20	16	1987.20
		250 x 75 x 20 x 2.0	2	0.50		6.90	3.45	32	110.40
		FLT	6	0.20	0.05	2.36	0.47	64	30.14
	Stay Angle	ISA 50 x 50 x 5	4	0.75		3.80	2.85	64	182.40
		FLT	8	0.08	0.05	3.14	0.25	64	16.08
5	Tie Rod	Dia 12.0		1.20		0.88	1.06	108	114.05
6	Gutter Clamp	ISF 25 x 3	3	1.20	0.03	0.59	0.71	46	32.50
7	Fascia		0.8	2.50	1.00	6.28	15.70	27	423.90
		Flahing Sheet	0.5	2.50	0.30	1.18	2.94	27	79.48
		End Runner	0.5	2.50	0.21	0.82	2.06	27	55.64

TOTAL WEIGHT = 8352.78
SQ.MTR. = 252.00
KG. PER SQ. MTR. = 33.15

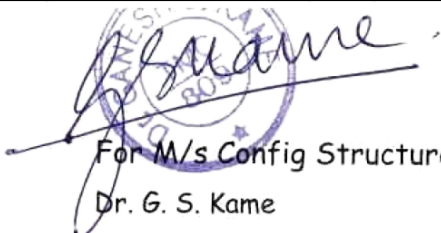
For M/s Config Structure
Dr. G. S. Kame